



Data sheet

Powador

3200 | 4200 | 4400

5300 | 5500 | 6600

Less is more: no transformer, lots of power.

The transformerless string inverters Powador 3200 to 6600.

Our Powador 3200 to 6600 transformerless single-phase inverters are equipped with digital controllers so that they can be used internationally. The appropriate country settings can easily be selected on-site; the country-specific settings are stored in the software, so the inverters can be quickly installed in any country. Users can also choose a menu language regardless of the selected country setting. We have changed the product names. The maximum PV generator power for which the particular unit is optimised can now be read from the designation. All units operate with a full bridge without a step-up converter. Four IGBT power switches reproduce the sine-shaped voltage curve of the public power grid employing pulse width modulation. These are true single-stage, self-commutated

units. However, the input voltage must be greater than the peak line voltage for them to be used.

The units are equipped with a MPP range of 350 V to 600 V. The open circuit voltage is 800 V, which simplifies the work of installers when laying out systems. The same is true for the integrated DC disconnect. Screw terminals make connecting to the grid easy. The units contain a single- or three-phase monitoring system, including an AC/DC-sensitive residual current protector. The units can thus be connected to the grid without any additional measures, even in installations with several inverters.

In addition, the units operate using purely passive noiseless convection cooling.

The heat that is lost is, to a great degree, dissipated via the heat sink on the rear of the unit. The rest of the heat is radiated from the surface of the aluminium housing. No fans, no problems, just long service life.

We provide a 10 year warranty on these units. In each case please observe the most current version of our Warranty and Service Conditions which you can download at www.kaco-newenergy.com.

Technical data

Powador 3200 | 4200 | 4400 | 5300 | 5500 | 6600

Electrical data	3200	4200	4400
Input variables			
MPP range	350 V ... 600 V	350 V ... 600 V	350 V ... 600 V
No-load voltage	800 V	800 V	800 V
Max. input current	8.6 A	11.5 A	12.0 A
Number of strings	3	3	3
Number of MPP trackers	1	1	1
Inverse polarity protection	short-circuit diode	short-circuit diode	short-circuit diode
Output variables			
Rated output	2 600 VA	3 450 VA	3 600 VA
Max. output	2 850 VA	3 800 VA	4 000 VA
Supply voltage	acc. to local requirements	acc. to local requirements	acc. to local requirements
Rated current	11.3 A	15.0 A	15.6 A
Rated frequency	50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz
cos phi	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive
Number of grid phases	1	1	1
General electrical data			
Max. efficiency	96.6 %	96.6 %	96.5 %
European efficiency	95.8 %	95.8 %	95.9 %
Night consumption	0 W	0 W	0 W
Switching plan	transformerless	transformerless	transformerless
Grid monitoring	acc. to local requirements	acc. to local requirements	acc. to local requirements
Mechanical data			
Display	LCD 2 x 16 characters	LCD 2 x 16 characters	LCD 2 x 16 characters
Control units	2 buttons for display control	2 buttons for display control	2 buttons for display control
Interfaces	RS232 / RS485, S0, Sym-bus	RS232 / RS485, S0, Sym-bus	RS232 / RS485, S0, Sym-bus
Fault signalling relay	potential-free NOC max. 250 V / 1 A	potential-free NOC max. 250 V / 1 A	potential-free NOC max. 250 V / 1 A
Connections	PCB terminals within the device (max. cross section: 10mm ²) cable supply via cable connections (DC connection M16, AC-connection M32)	PCB terminals within the device (max. cross section: 10mm ²) cable supply via cable connections (DC connection M16, AC-connection M32)	PCB terminals within the device (max. cross section: 10mm ²) cable supply via cable connections (DC connection M16, AC-connection M32)
Ambient temperature	-20 °C ... +60 °C*	-20 °C ... +60 °C*	-20 °C ... +60 °C*
Temperature monitoring heat sink	> 75 °C temperature-dependent power limitation / > 85 °C cut-out	> 75 °C temperature-dependent power limitation / > 85 °C cut-out	> 75 °C temperature-dependent power limitation / > 85 °C cut-out
Cooling	free convection / no fan	free convection / no fan	free convection / no fan
Protection class	IP54	IP54	IP54
Noise emission	< 35 dB (A) (noiseless)	< 35 dB (A) (noiseless)	< 35 dB (A) (noiseless)
DC switch	integrated	integrated	integrated
Casing	aluminium	aluminium	aluminium
H x W x D	500 x 340 x 200 mm	550 x 340 x 200 mm	550 x 340 x 220 mm
Weight	19 kg	21 kg	21 kg

* Power derating at high ambient temperatures

5300	5500	6600
Input variables		
350 V ... 600 V	350 V ... 600 V	350 V ... 600 V
800 V	800 V	800 V
14.5 A	15.2 A	18.0 A
3	3	3
1	1	1
short-circuit diode	short-circuit diode	short-circuit diode
Output variables		
4 400 VA	4 600 VA	5 500 VA
4 800 VA	5 060 VA	6 000 VA
acc. to local requirements	acc. to local requirements	acc. to local requirements
19.1 A	20.0 A	23.9 A
50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz
0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive
1	1	1
General electrical data		
96.4 %	96.3 %	96.3 %
95.8 %	95.7 %	95.8 %
0 W	0 W	0 W
transformerless	transformerless	transformerless
acc. to local requirements	acc. to local requirements	acc. to local requirements
Mechanical data		
LCD 2 x 16 characters	LCD 2 x 16 characters	LCD 2 x 16 characters
2 buttons for display control	2 buttons for display control	2 buttons for display control
RS232 / RS485, S0, Sym-bus	RS232 / RS485, S0, Sym-bus	RS232 / RS485, S0, Sym-bus
potential-free NOC max. 250 V / 1 A	potential-free NOC max. 250 V / 1 A	potential-free NOC max. 250 V / 1 A
PCB terminals within the device (max. cross section: 10mm ²) cable supply via cable connections (DC connection M16, AC-connection M32)	PCB terminals within the device (max. cross section: 10mm ²) cable supply via cable connections (DC connection M16, AC-connection M32)	PCB terminals within the device (max. cross section: 10mm ²) cable supply via cable connections (DC connection M16, AC-connection M32)
-20 °C ... +60 °C*	-20 °C ... +60 °C*	-20 °C ... +60 °C*
> 75 °C temperature-dependent power limitation / > 85 °C cut-out	> 75 °C temperature-dependent power limitation / > 85 °C cut-out	> 75 °C temperature-dependent power limitation / > 85 °C cut-out
free convection / no fan	free convection / no fan	free convection / no fan
IP54	IP54	IP54
< 35 dB (A) (noiseless)	< 35 dB (A) (noiseless)	< 35 dB (A) (noiseless)
integrated	integrated	integrated
aluminium	aluminium	aluminium
550 x 340 x 220 mm	600 x 340 x 220 mm	600 x 340 x 220 mm
22.5 kg	28 kg	30 kg

* Power derating at high ambient temperatures



Powador
3200 | 4400 | 5300
5500 | 6600

Capable of reactive power

Integrated, potential-free
fault signal

Silent, maintenance-free
convection cooling


Preconfigured, international
country settings

Menu language can be chosen
as required


Asymmetry monitoring via special
KACO Sym-Bus

Graphical Display of efficiency

3D efficiency diagram for Powador 6600

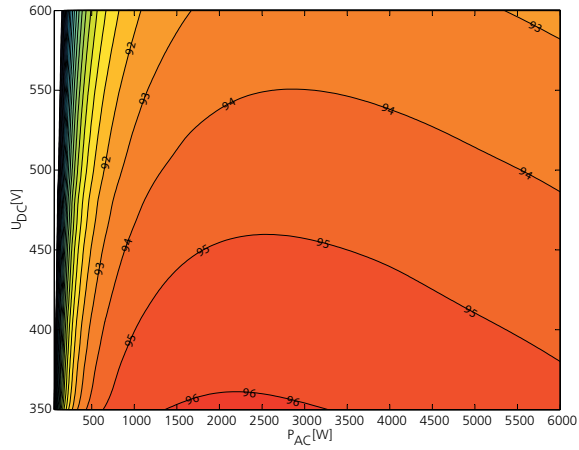

Efficiency characteristic curve for Powador 6600

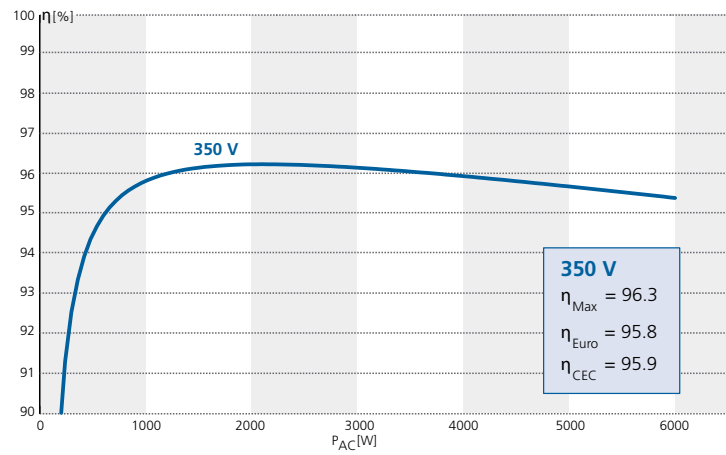

Your retailer